


BACCO FF



Tubo trasparente in PVC con spirale di rinforzo in PVC rigido antiurto di colore rosso, liscio internamente, robusto, ma molto flessibile. Parete idonea al contatto alimenti. Versione antistatica su richiesta.


• Industria alimentare: aspirazione e mandata di liquidi alimentari quali succhi di frutta, aceto, vino e liquori con concentrazione alcolica fino al 50%.

Alimentare secondo il Regolamento Europeo Reg. UE 10/2011 (classi A,B, C, D1 e alimenti secchi).

Transparent PVC hose with a red anti-shock rigid PVC spiral. Smooth inside, strong and resistant to loads although flexible. The hard plastic helix is food grade as well as the wall, making bacco a totally food hose. Antistatic version on request.

• *Food industry: suction and delivery of liquids in general (beverages, juices, vinegar, wines and liquors with alcohol concentration up to 50%).*

Food grade according to EU Reg.10/2011 (classes A, B, C, D1 and dry food).

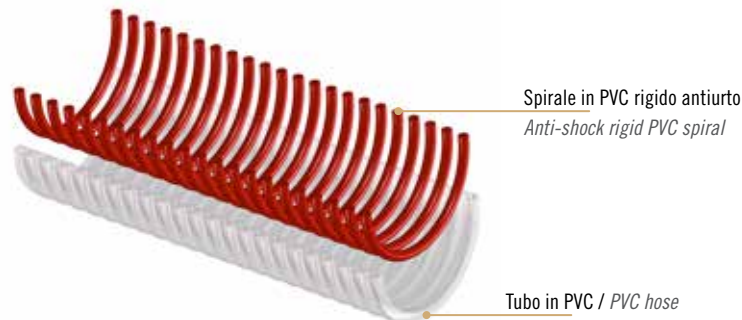

Scheda tecnica / Technical data

Codice	Ø Int.	Spess. Min.	Spess. Max.	Peso	P.E.	P.S.	Depr.	R. Curvatura	Lg. Rotolo	Vol.
Code	Ins. Ø	Min wall th.	Max. wall th.	Weight	WP	BP	Vac.	Bending	Coil lgth.	Vol.
	mm	mm	mm	g/m	bar	bar	m H ₂ O	mm	m	m ³
BF 01 019.0 000.0	19*	3,2	3,5	300	9	27	10	110	50	0,067
BF 01 020.0 000.0	20	3,2	3,5	310	9	27	10	110	50	0,070
BF 01 025.0 000.0	25	3,3	3,7	400	8	24	10	170	50	0,094
BF 01 030.0 000.0	30	3,5	3,9	500	8	24	10	190	50	0,121
BF 01 032.0 000.0	31,8	3,5	3,9	520	7	21	10	230	50	0,140
BF 01 035.0 000.0	35	3,7	4,2	600	7	21	10	230	50	0,153
BF 01 038.0 000.0	38,1	4,1	4,5	730	7	21	10	260	50	0,191
BF 01 040.0 000.0	40	4,1	4,6	760	7	21	10	270	50	0,208
BF 01 045.0 000.0	45*	4,4	4,9	920	7	21	10	310	50	0,242
BF 01 050.0 000.0	50	4,7	5,3	1100	6	18	10	350	50	0,315
BF 01 052.0 000.0	50,8	4,7	5,3	1120	6	18	10	350	50	0,319
BF 01 055.0 000.0	55*	5,0	5,5	1270	6	18	10	370	50	0,355
BF 01 060.0 000.0	60	5,2	5,8	1470	6	18	10	415	50	0,469
BF 01 063.0 000.0	63,5*	5,5	6,1	1630	6	18	10	440	50	0,511
BF 01 070.0 000.0	70*	5,6	6,3	1800	5	15	10	480	50	0,611
BF 01 076.0 000.0	76,2	5,7	6,3	1960	5	15	10	525	50	0,657
BF 01 080.0 000.0	80	6,1	6,8	2200	5	15	10	555	30	0,550
BF 01 090.0 000.0	90*	6,4	7,1	2610	5	15	10	630	30	0,631
BF 01 100.0 000.0	100	7,3	8,1	3310	5	15	9	695	30	0,784
BF 01 102.0 000.0	102	7,3	8,1	3360	5	15	9	695	30	0,797
BF 01 110.0 000.0	110*	7,4	8,2	3660	4	12	9	780	30	0,971
BF 01 120.0 000.0	120	7,8	8,6	4210	4	12	9	900	30	1,162
BF 01 127.0 000.0	127*	7,7	8,6	4410	4	12	9	1000	30	1,250
BF 01 150.0 000.0	151,5*	9,3	10,3	6410	4	12	8,5	1300	20	1,350
BF 01 152.0 000.0	152,8*	9,3	10,3	6410	4	12	8,5	1300	20	1,360

*Disponibile su richiesta, per quantitativi da concordare con l'ufficio vendite / *Available on request, contact our sales office for more info and quantities

I dati tecnici qui riportati sono stati misurati a 23°C e al 50% di umidità / The technical data here reported were measured at 23°C with 50% humidity